

# RIG DHABI II




## STANDARD SPECIFICATION JACK-UP

GENERAL DESCRIPTION		STORAGE CAPACITIES	
Design / Generation	BMC 150	Fuel Oil	2,162 bbls
Constructing Shipyard	Promet Shipyard, Singapore	Liquid Mud	1,549 bbls
Year Entered Service/ Significant Upgrade	1981	Drill Water	6,156 bbls
Classification	ABS, A1, Self-Elevating Drilling Unit	Potable Water	2,052 bbls
Flag	Liberia	Bulk Material	(mud + cement) 8000 cu-ft
Overall Dimensions	151 ft. long x 156 ft. wide x 18 ft. deep	Sack Storage	5,000 sacks
Legs	(3) 217 ft. long, Cylindrical	BOP & WELL CONTROL EQUIPMENT	
Draft	12 ft at load line	BOP Ram	(1) AXON type-50 13 5/8"10k Single BOP
Accommodation	88 persons	BOP Ram	(1) AXON type-50 13 5/8"10k Double BOP
Displacement	14520 kips	BOP Annular	(1) AXON Type-51 (GK) 13 5/8"5k Annular BOP
Variable Deck	2509 kips (50/150 ft WD) operating/ 3274 kips afloat	BOP Handling	(2) Ingersoll Rand hoists, rated 37.5 MT
Transit Speed	up to 4 knots, @ 9,000 hp sea tug	Diverter	(1) AXON Type-52 21 1/4" 2k Annular Preventer
Operating Water Depth	160 ft. designed / 110 ft. outfitted	MOORING EQUIPMENT	
Maximum Drilling Depth	20,000ft	Mooring Winches	(4) BMC 6020 electric winches rated at 50,000 lbs. pull
DRILLING EQUIPMENT		Anchor Lines	(4) 1-1/4" Wire rope
Derrick	Dreco; 160 ft. high with 30ft x 30 ft base	Anchors	N/A
Hook-load Capacity	1,100,000 lbs. gross nominal capacity	CRANES	
Draw works	Continental EMSCO C2 Type II Max hook load, 1,000 kips with 12 lines	Cranes	(1) BMC1600D crane, 51 st capacity, 100 ft boom
	(2) x EMD-D79 MB6 motors suitable for 1 -3/8" drill lines.		(1) BMC 900 crane, 25 st capacity, 100 ft boom
Rotary Table	Continental EMSCO T3750 37.5" table opening, electric drive, rated 650 Mt	SPECIAL FEATURES & OTHER INFORMATION	
Top Drive	Varco TDS-3 Electric 500 st, 1100HP	Helideck	Rated AW189 helicopters. (8.6mt)- CAAP 71 2016 Revision
Mud Pumps	(2) Continental EMSCO FB 1600 pumps, each driven by 1,000 hp (2x EMD motor) 5,000 psi rated	POWER & MACHINERY	
Cantilever/ Drill floor	40 ft / 10 ft Port & Stbd	Main Power	(4) Caterpillar D399 diesel engines rated at 1,215 hp each with KATO generator rated to 1,500 kVA
Solids Control	(3) SWACO Single Unit type	Emergency Power	(1) Caterpillar D399 diesel engine rated at 1,215 hp with KATO generator rated to 1,333 kVA




**Additional information please contact:** Ocean Oilfield Drilling, PO Box: 132612, Mussafah MN1, Abu Dhabi, UAE  
Tel: +971 2 444 5852 / 2 575 1888 Email: [marketing@oceanoilfield.com](mailto:marketing@oceanoilfield.com) Website: [www.oceanoilfield.com](http://www.oceanoilfield.com)

These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Ocean Oilfield standard operating manuals, policies and procedures and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

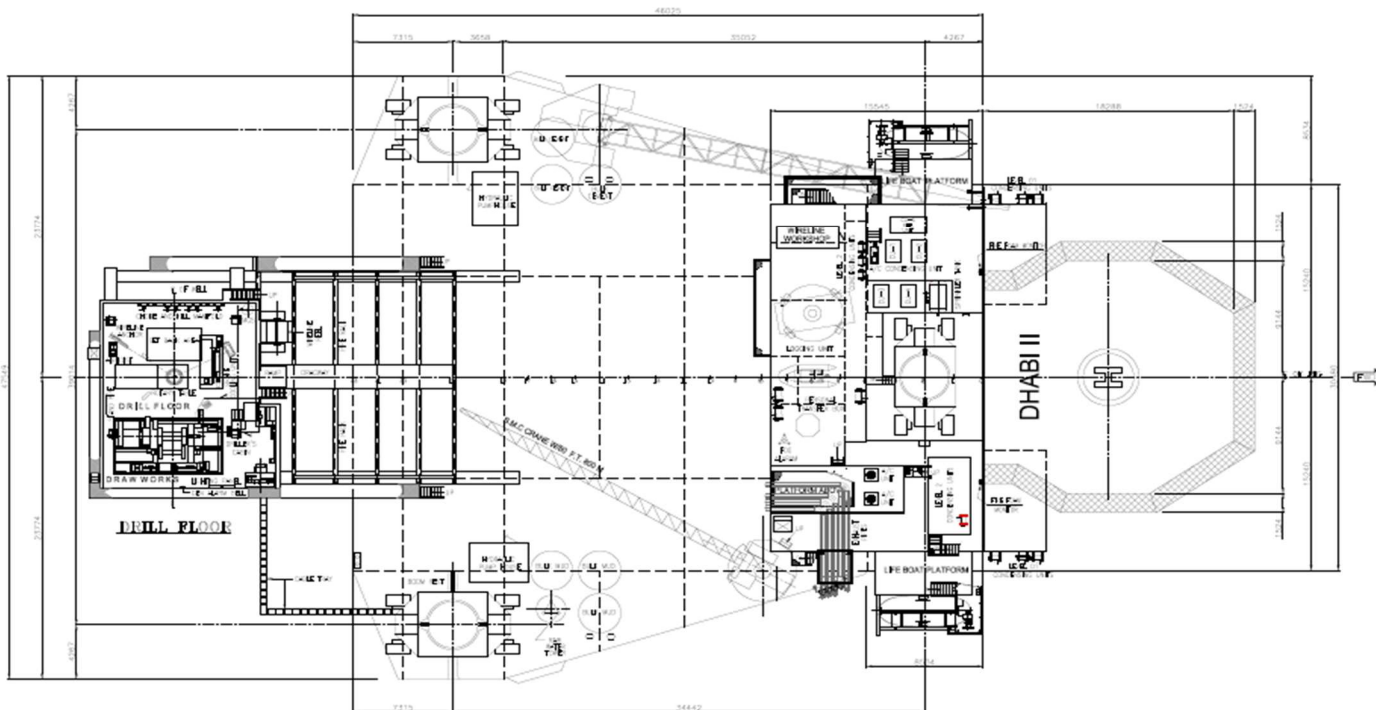

ABOVE MAIN DECK LEVEL

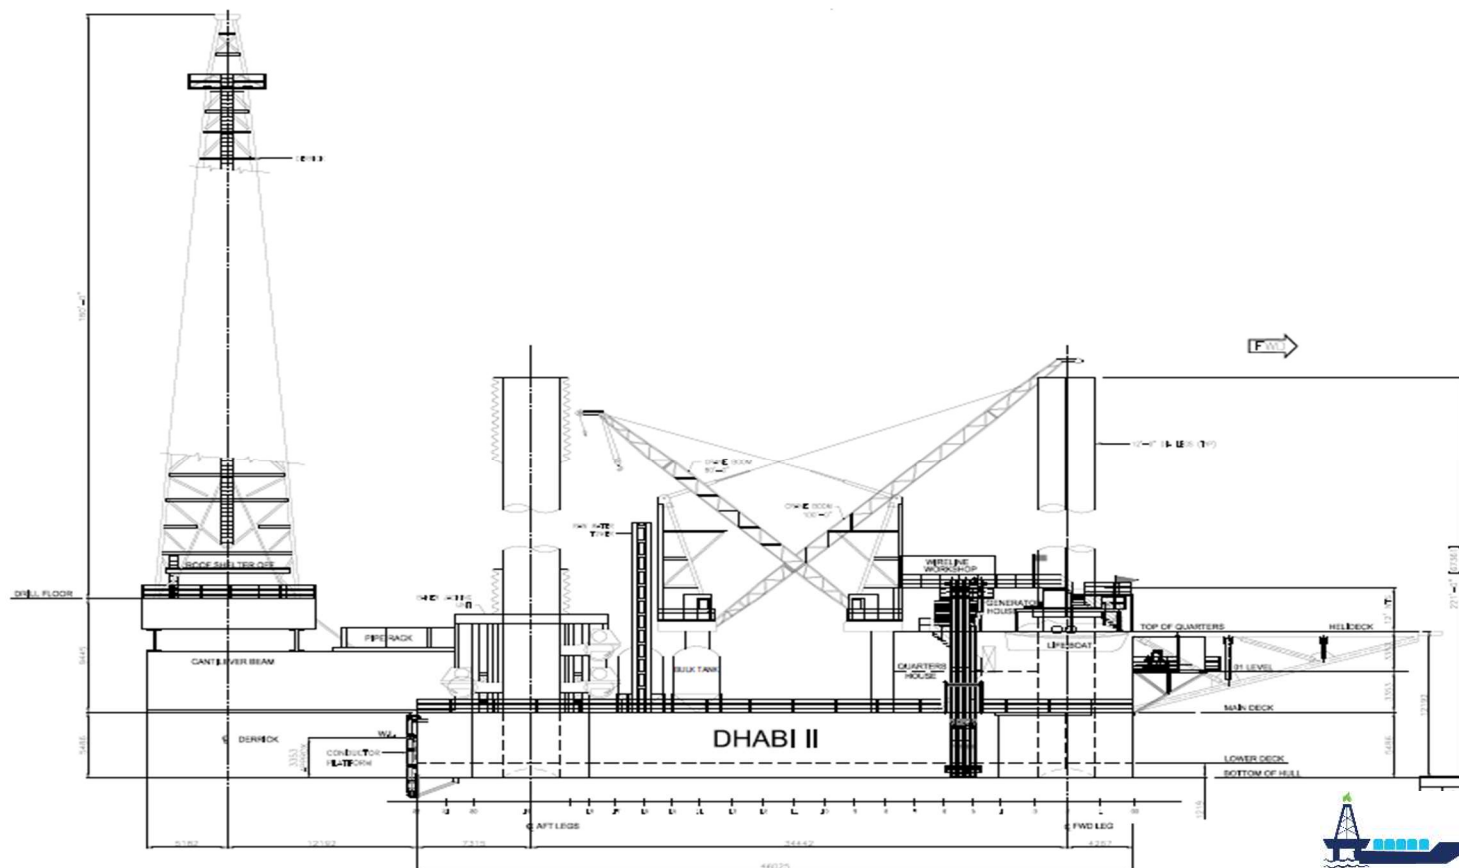

OUTER PROFILE



Ocean Oilfield Drilling, PO Box: 132612, Mussafah MN1, Abu Dhabi, UAE  
 Tel: +971 2 444 5852 / 2 575 1888 Email: [marketing@oceanoilfield.com](mailto:marketing@oceanoilfield.com) Website: [www.oceanoilfield.com](http://www.oceanoilfield.com)

These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Ocean Oilfield standard operating manuals, policies and procedures and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.